

# XYLIO®



PROTECTIVE  
— AND ATTRACTIVE



## AN ELEGANT AND SECURE RAILING

OVAL RAIL AND ROUND BARS

 Government and local authorities

 Industrial sites

 Parks and gardens

R  
A  
I  
L  
I  
N  
G  
S



*“FLÈCHE”*

### Strong points

#### Attractive

- Elegant design: original profile, oval rail, round bars cut off at 45°
- Design: uniquely shaped post with factory assembled solid cap the same colour as the railing
- Factory assembled “*FLÈCHE*” decorative cap: painted the same colour as the railing (optional)
- Finish: linking system painted the same colour as the railing
- Standard colours: ● Green 6005 - ● Black 9005 - ○ White 9010

## Strength

- Tamper-proof
- Extra-strong profiles:
  - Oval rail 50x30 mm
  - Round bars Ø 25 mm
- Linking pieces clamped together in the factory

## Long life

- Finish: galvanised steel + polyester coating
- Ten years Professional guarantee



## Easy to install

- Sequential installation
- Post slotted throughout the height (every 5 cm)
- Any configuration possible:

- Corners



- Steps



- Railing can be cut down and repaired using standard elements

## Modular

- Wide range:
  - 8 railing heights: from 0.80 m to 2.50 m
  - Post on base plate or to be embedded: from 0.80 m to 2.50 m
- Options:
  - Bars extending from top rail and/or bottom rail
  - Flush finish at top rail and/or bottom rail
  - Tops of bars cut off at 45° (standard)
  - Tops of bars cut straight across (optional)



Post on base plate



Bars extending from rail  
Cut off at 45°





Flush finish at top rail



Bars extending from rail  
Cut straight across

### Accessories:

- Wall fixing: to be embedded or on base plate
- Accessory for concrete gravel board

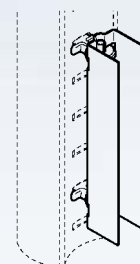

- 200 RAL colours




To benefit from the DIRICKX 10 years Professional Guarantee against corrosion, please ask us for our "request for guarantee" document. The Guarantee is provided in accordance with the general conditions governing attribution.

TECHNICAL SPECIFICATION




How to install

Each order is delivered with instruction leaflet

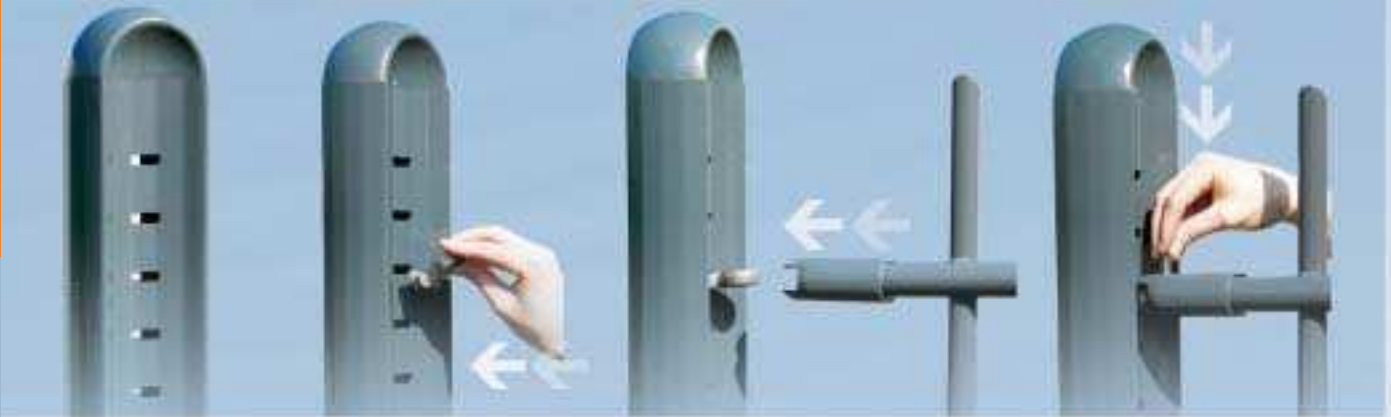

- 1** Install the first post
- 2** Position 2 lugs in the post
- 3** Offer the railing to the post
- 4** Lock the railing onto the post using a pin

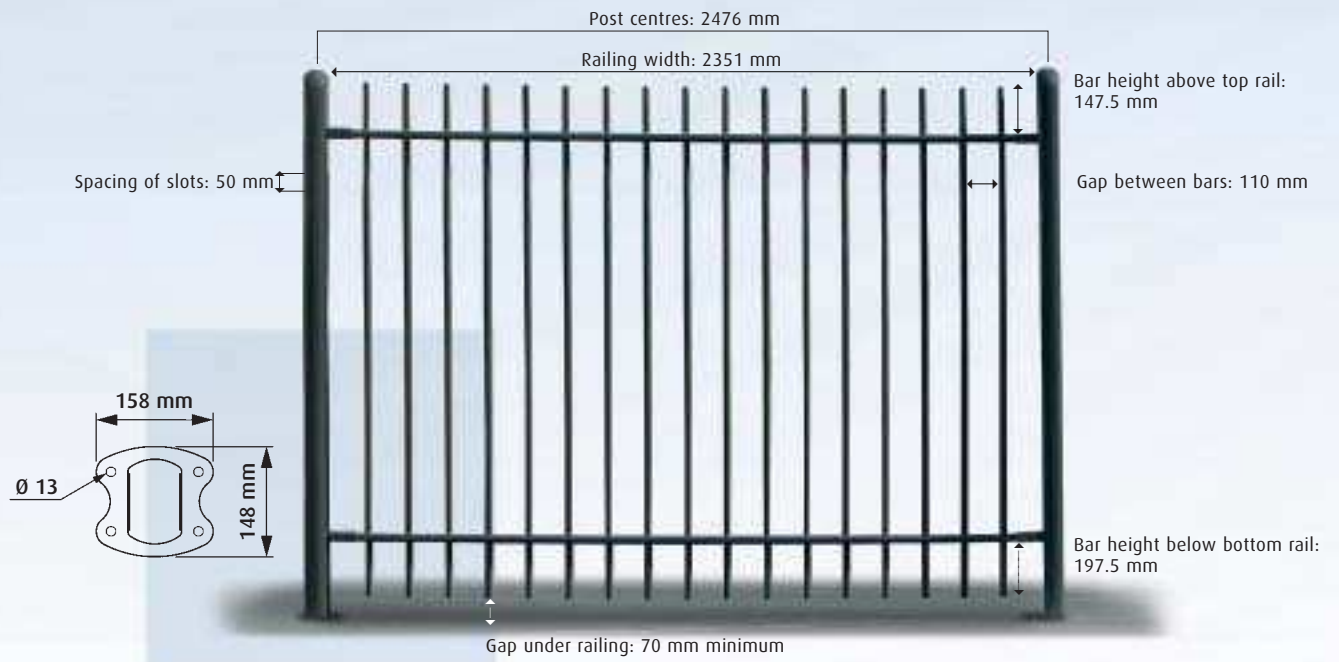

Technical specification XYLIO

XYLIO	RAILING						POST TO BE EMBEDDED		POST ON BASE PLATE	
	Nominal height (m)	Post centres (m)	Rail (mm)	Bars (mm)	Bars extending above top rail	Bars extending below bottom rail	Weight (Kg)	Nominal height (m)	Weight (Kg)	Nominal height (m)
0.80	2.476	50 x 30	25 x 25	no	no	25	1.30	4.50	0.80	5.00
1.00	2.476	50 x 30	25 x 25	no	no	28	1.50	5.50	1.00	6.50
1.20	2.476	50 x 30	25 x 25	no	no	31	1.70	6.50	1.20	7.50
1.50	2.476	50 x 30	25 x 25	yes	yes	35	2.00	8.00	1.50	9.00
1.80	2.476	50 x 30	25 x 25	yes	yes	39	2.30	9.50	1.80	10.50
2.00	2.476	50 x 30	25 x 25	yes	yes	42	2.50	10.50	2.00	11.50
2.20	2.476	50 x 30	25 x 25	yes	yes	45	2.70	12.00	2.20	13.00
2.50	2.476	50 x 30	25 x 25	yes	yes	50	3.00	13.00	2.50	14.00



DIRICKX GROUPE - 53800 CONGRIER - FRANCE  
 TEL : 00 33 (0)2 43 09 38 38 - FAX : 00 33 (0)2 43 09 38 99  
 www.dirickx.com - E-mail : info@dirickx.com